
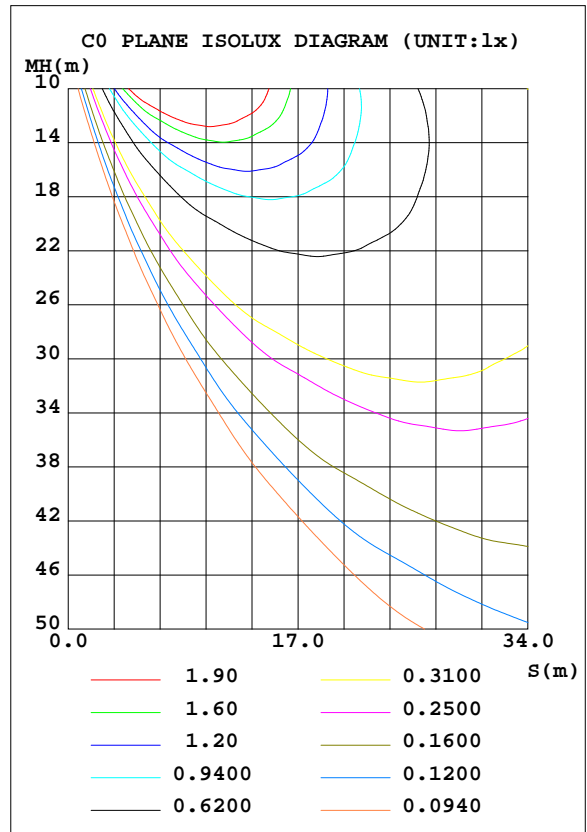


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.50 lm/W			
MODEL		I _{max} (cd)	1813	S/MH(C0/180)	0.15
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	9.58
RATED VOLTAGE(V)		TOTAL FLUX(lm)	4532.5	η UP, DN(C0-180)	27.0,28.2
NOMINAL FLUX(lm)	4532.51	CIE CLASS	DIFFUSE	η UP, DN(C180-360)	22.0,22.8
LAMPS INSIDE	1	η up(%)	49.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)		η down(%)	51.0	CIBSE SHR MAX	1.00

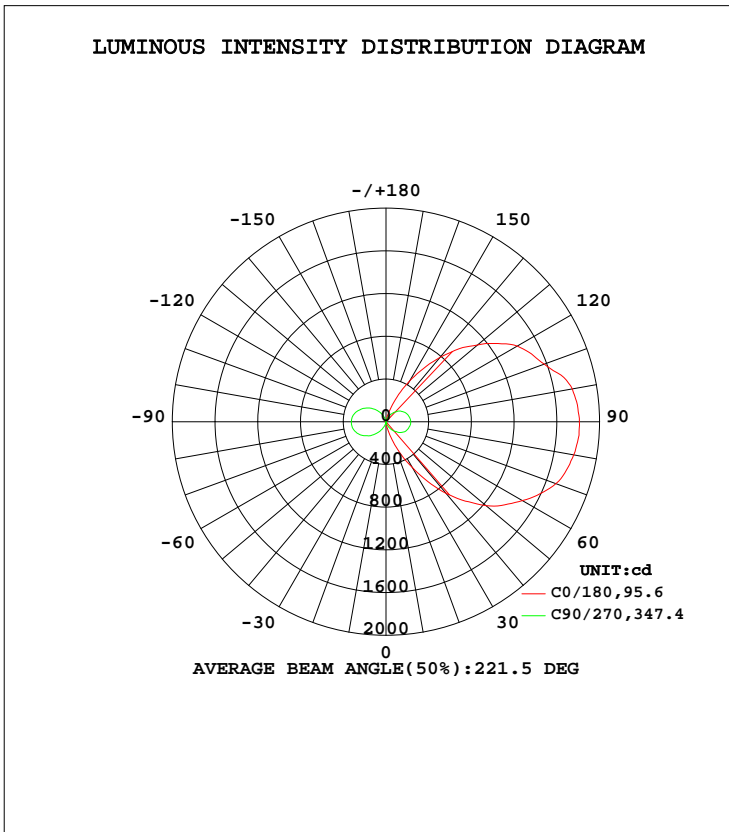

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	37.91	21.26	8.392	3.456	1.844	4.355	10.52	25.23	0- 10	0.8241	0.8241	0.02,0.02
20	206.4	104.4	29.34	8.139	2.536	11.65	39.39	128.1	10- 20	10.39	11.21	0.25,0.25
30	497.8	257.5	69.02	18.93	3.689	26.29	88.15	306.7	20- 30	49.60	60.82	1.34,1.34
40	876.1	419.3	110.6	31.11	5.149	47.76	143.7	522.3	30- 40	128.1	188.9	4.17,4.17
50	1223	573.5	157.7	37.55	6.628	58.53	205.9	707.7	40- 50	235.7	424.6	9.37,9.37
60	1477	677.9	192.0	39.87	7.972	63.88	256.2	872.8	50- 60	345.6	770.2	17,17
70	1694	780.4	214.2	43.87	9.066	71.19	296.2	999.7	60- 70	449.7	1220	26.9,26.9
80	1785	832.9	227.0	42.85	9.796	72.97	319.7	1049	70- 80	528.4	1748	38.6,38.6
90	1811	838.7	232.0	43.32	10.04	73.89	325.0	1061	80- 90	563.1	2311	51,51
100	1772	816.1	226.1	42.79	9.776	72.72	316.4	1034	90-100	560.1	2871	63.4,63.4
110	1577	743.2	212.0	43.61	9.122	70.61	288.6	943.8	100-110	511.5	3383	74.6,74.6
120	1420	641.9	188.4	40.76	8.123	64.72	249.8	830.3	110-120	428.9	3812	84.1,84.1
130	1121	535.0	157.7	38.93	6.778	60.67	201.1	665.7	120-130	329.3	4141	91.4,91.4
140	787.4	382.5	113.9	32.70	5.414	50.89	145.9	485.0	130-140	221.1	4362	96.2,96.2
150	437.1	226.5	71.83	20.35	4.013	29.53	91.24	274.7	140-150	118.8	4481	98.9,98.9
160	148.1	79.57	30.94	7.906	2.764	11.91	38.63	96.62	150-160	43.73	4525	99.8,99.8
170	12.52	9.702	6.007	2.030	1.247	2.910	7.435	10.03	160-170	7.393	4532	100,100
180	0.5954	0.5782	0.5517	0.5452	0.6338	0.5493	0.5517	0.5452	170-180	0.2496	4533	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 292.39 lm

%lum = 6.5%

%lamp = 6.5%

Conical surface Flux(120deg): 770.2 lm

%lum = 17.0%


%lamp = 17.0%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:

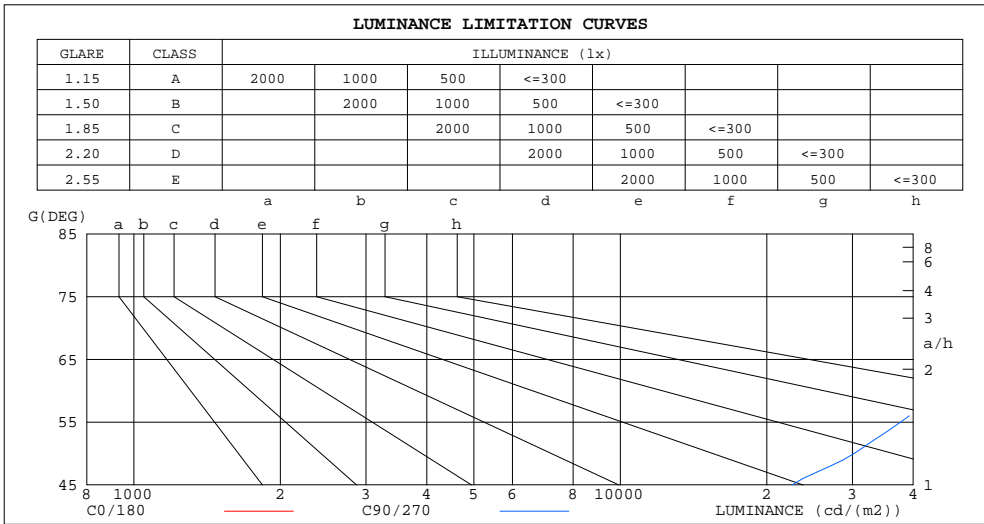

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1707480	327994
80	846660	161187
75	556545	105236
70	407804	77207
65	310254	60017
60	243264	47341
55	194703	37697
50	156633	30252
45	122398	22552


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.07	1.07	1.07	.99	.99	.99	.84	.84	.84	.70	.70	.70	.57	.57	.57	.51
1.0	.84	.78	.72	.77	.72	.66	.64	.59	.55	.52	.48	.45	.40	.38	.35	.30
2.0	.70	.61	.54	.64	.56	.49	.52	.46	.41	.42	.37	.33	.32	.28	.25	.20
3.0	.59	.50	.42	.54	.45	.38	.44	.37	.31	.35	.29	.25	.26	.22	.18	.14
4.0	.51	.41	.34	.47	.38	.31	.38	.31	.25	.30	.24	.19	.22	.18	.14	.10
5.0	.45	.35	.28	.41	.32	.25	.33	.26	.20	.26	.20	.16	.19	.15	.11	.08
6.0	.40	.30	.23	.36	.27	.21	.29	.22	.17	.23	.17	.13	.17	.12	.09	.06
7.0	.35	.26	.19	.32	.24	.18	.26	.19	.14	.20	.15	.11	.15	.11	.07	.05
8.0	.32	.23	.17	.29	.21	.15	.23	.17	.12	.18	.13	.09	.14	.09	.06	.04
9.0	.29	.20	.14	.26	.18	.13	.21	.15	.10	.17	.12	.08	.12	.08	.05	.03
10.0	.26	.18	.13	.24	.16	.11	.19	.13	.09	.15	.10	.07	.11	.07	.05	.02

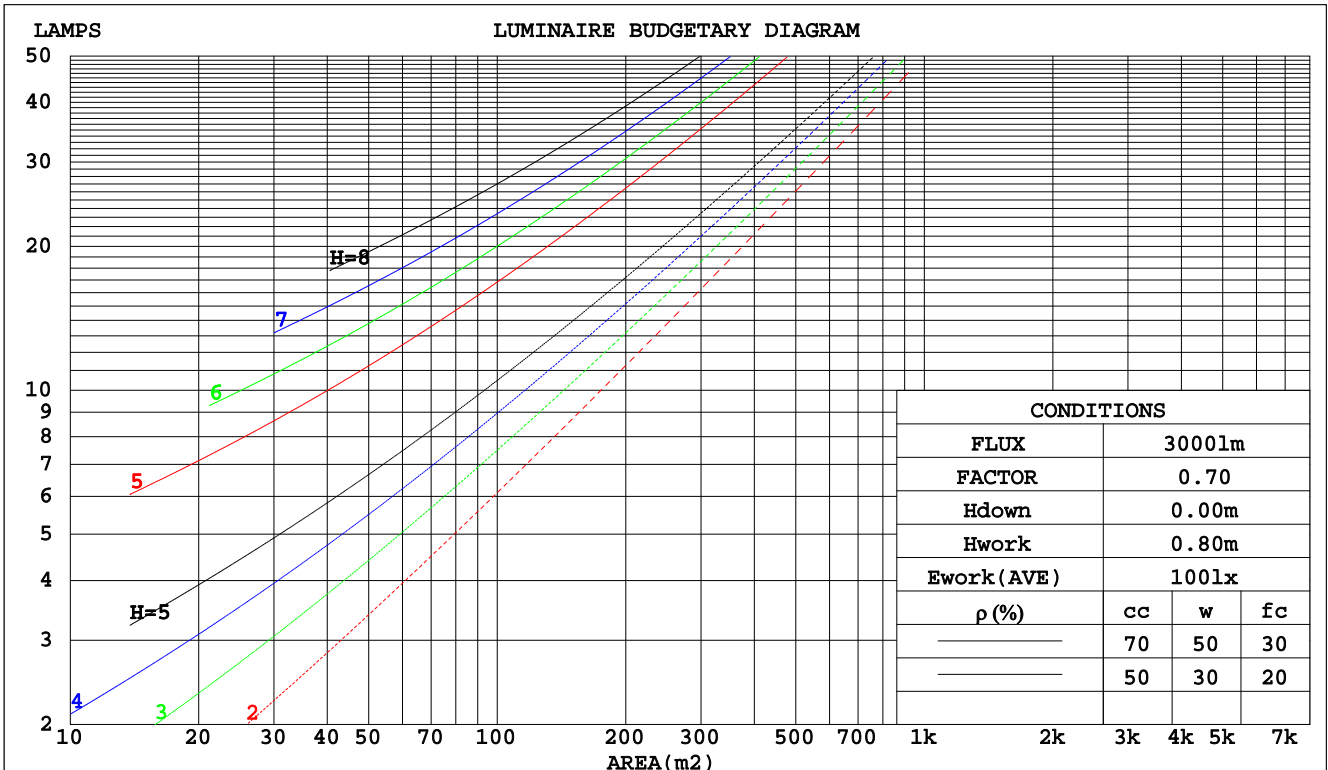

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LH
 Test Date: 2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 9.660m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.458	.260	.082	.436	.248	.079	.394	.226	.072	.356	.205	.066	.320	.186	.060	
2.0	.374	.205	.063	.353	.195	.060	.315	.175	.054	.280	.157	.049	.247	.140	.044	
3.0	.321	.171	.051	.303	.162	.049	.268	.145	.044	.235	.129	.040	.205	.114	.035	
4.0	.283	.147	.043	.266	.139	.041	.234	.124	.037	.204	.110	.033	.177	.096	.029	
5.0	.253	.129	.037	.238	.122	.036	.208	.108	.032	.181	.095	.028	.155	.083	.025	
6.0	.229	.115	.033	.215	.109	.031	.188	.096	.028	.162	.084	.025	.139	.073	.022	
7.0	.210	.104	.029	.196	.098	.028	.171	.087	.025	.148	.076	.022	.126	.065	.019	
8.0	.193	.094	.027	.181	.089	.025	.157	.079	.022	.135	.069	.020	.115	.059	.017	
9.0	.179	.086	.024	.167	.082	.023	.146	.072	.020	.125	.063	.018	.106	.054	.016	
10.0	.166	.080	.022	.156	.075	.021	.135	.066	.019	.116	.058	.016	.098	.049	.014	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.564	.564	.564	.482	.482	.482	.329	.329	.329	.189	.189	.189	.060	.060	.060	
1.0	.567	.531	.499	.485	.456	.430	.332	.314	.297	.191	.182	.173	.061	.058	.056	
2.0	.562	.510	.467	.481	.439	.404	.330	.304	.282	.190	.177	.165	.061	.057	.054	
3.0	.555	.496	.448	.476	.428	.388	.327	.297	.272	.189	.173	.161	.061	.056	.053	
4.0	.548	.484	.436	.470	.419	.379	.323	.292	.267	.187	.171	.158	.060	.056	.052	
5.0	.540	.476	.428	.464	.411	.372	.320	.287	.263	.185	.169	.156	.060	.055	.051	
6.0	.533	.468	.422	.458	.406	.368	.316	.284	.260	.183	.167	.155	.059	.055	.051	
7.0	.526	.462	.418	.452	.401	.364	.312	.281	.258	.181	.166	.154	.059	.054	.051	
8.0	.519	.457	.415	.447	.396	.362	.309	.278	.256	.180	.164	.153	.058	.054	.051	
9.0	.512	.453	.412	.441	.393	.360	.306	.276	.255	.178	.163	.152	.058	.054	.050	
10.0	.507	.449	.410	.437	.390	.358	.303	.274	.254	.177	.162	.152	.057	.053	.050	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.5lx1 lm										
NAME: 36W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.08*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	31.1	32.3	32.0	33.2	34.3	24.9	26.0	25.7	26.9	28.1
3H	35.3	36.4	36.2	37.3	38.5	27.8	28.9	28.7	29.8	31.0
4H	37.5	38.5	38.4	39.5	40.7	29.4	30.4	30.3	31.3	32.5
6H	39.9	40.9	40.8	41.8	43.0	31.1	32.0	32.0	33.0	34.2
8H	41.2	42.1	42.1	43.1	44.3	32.0	32.9	32.9	33.9	35.1
12H	42.6	43.5	43.6	44.5	45.7	33.1	33.9	34.0	34.9	36.1
4H 2H	31.6	32.6	32.5	33.5	34.8	28.0	29.0	28.9	29.9	31.1
3H	36.0	36.9	36.9	37.9	39.1	30.8	31.7	31.7	32.6	33.9
4H	38.5	39.3	39.4	40.2	41.5	32.3	33.2	33.3	34.1	35.4
6H	41.1	41.8	42.0	42.8	44.1	34.0	34.7	34.9	35.7	37.0
8H	42.5	43.1	43.4	44.1	45.4	34.8	35.5	35.8	36.5	37.8
12H	44.0	44.7	45.0	45.7	47.0	35.8	36.4	36.8	37.4	38.8
8H 4H	38.8	39.5	39.7	40.5	41.7	34.5	35.2	35.5	36.2	37.5
6H	41.7	42.3	42.7	43.3	44.6	36.4	37.0	37.4	38.0	39.3
8H	43.3	43.8	44.3	44.9	46.2	37.4	37.9	38.4	39.0	40.3
12H	45.2	45.6	46.2	46.7	48.0	38.5	38.9	39.5	40.0	41.3
12H 4H	38.8	39.4	39.8	40.4	41.7	35.3	35.9	36.3	36.9	38.2
6H	41.8	42.3	42.8	43.3	44.7	37.4	37.9	38.4	38.9	40.3
8H	43.5	44.0	44.6	45.0	46.4	38.5	39.0	39.5	40.0	41.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				

CIE Pub.117 Corrected 4533 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.3)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	32	19	11	31	18	11	27	16	10	3
0.80	41	26	17	38	25	16	33	22	14	5
1.00	48	32	23	45	31	21	39	29	19	8
1.25	55	39	29	51	37	27	44	32	24	10
1.50	60	45	34	56	42	32	47	36	28	13
2.00	68	54	43	63	50	41	53	43	35	17
2.50	74	60	50	68	56	47	57	48	40	20
3.00	78	66	56	72	61	52	60	52	45	23
4.00	84	73	64	77	67	60	65	57	51	27
5.00	87	78	70	80	72	65	68	61	55	30
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:

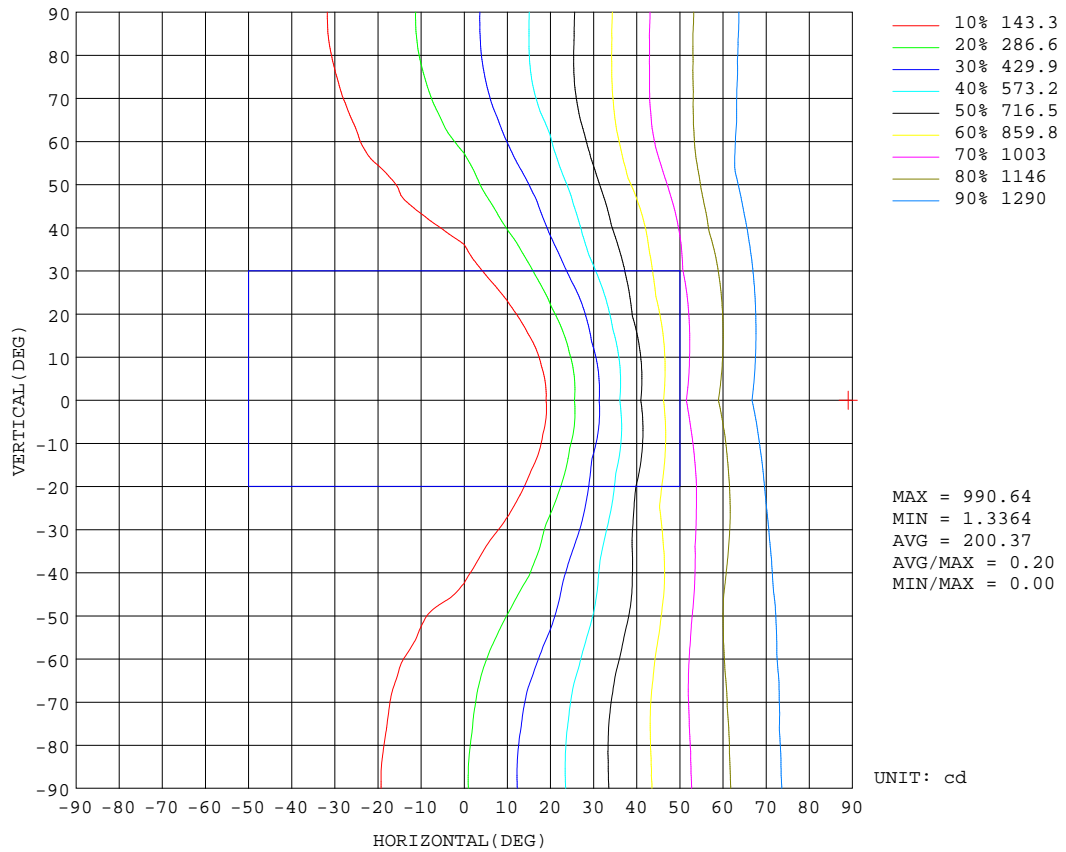


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:

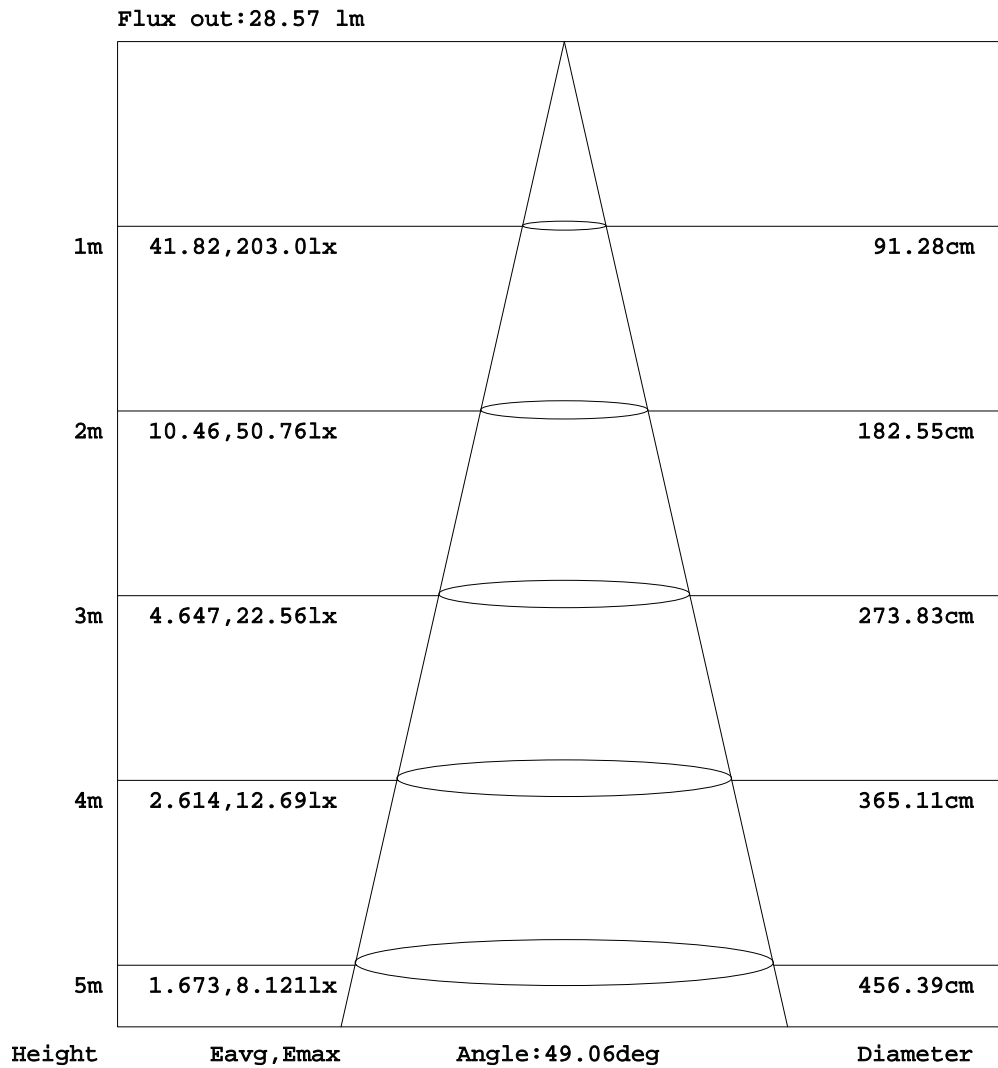


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:

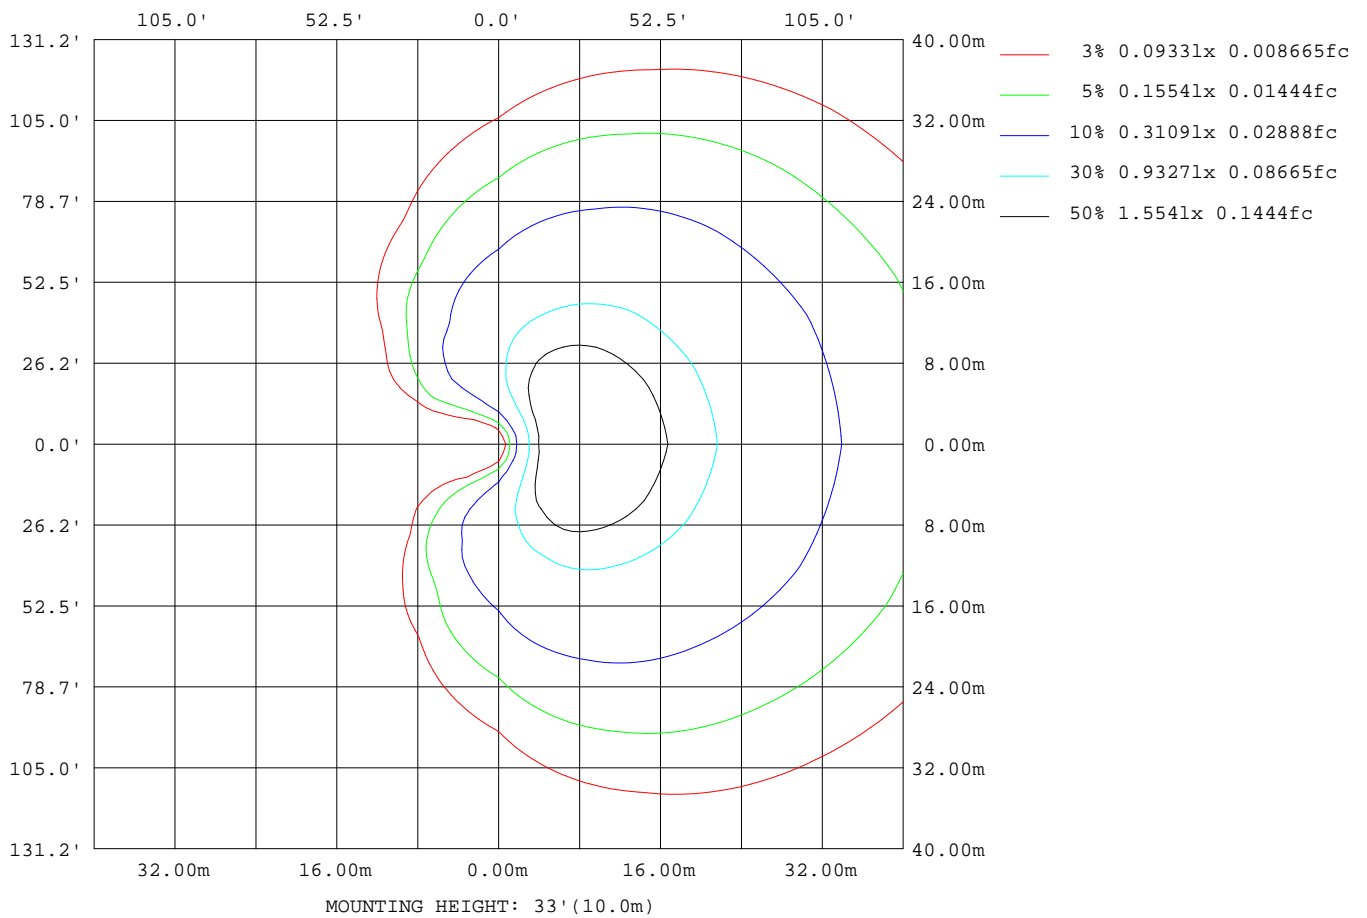

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	197273
L_0~180(75)av	353888
L_0~180(85)av	1085839
L_90~270(65)av	59585
L_90~270(75)av	106767
L_90~270(85)av	332412
L_45(65)av	110238
L_45(75)av	197247
L_45(85)av	602231

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks:

Planar Illuminance Curve

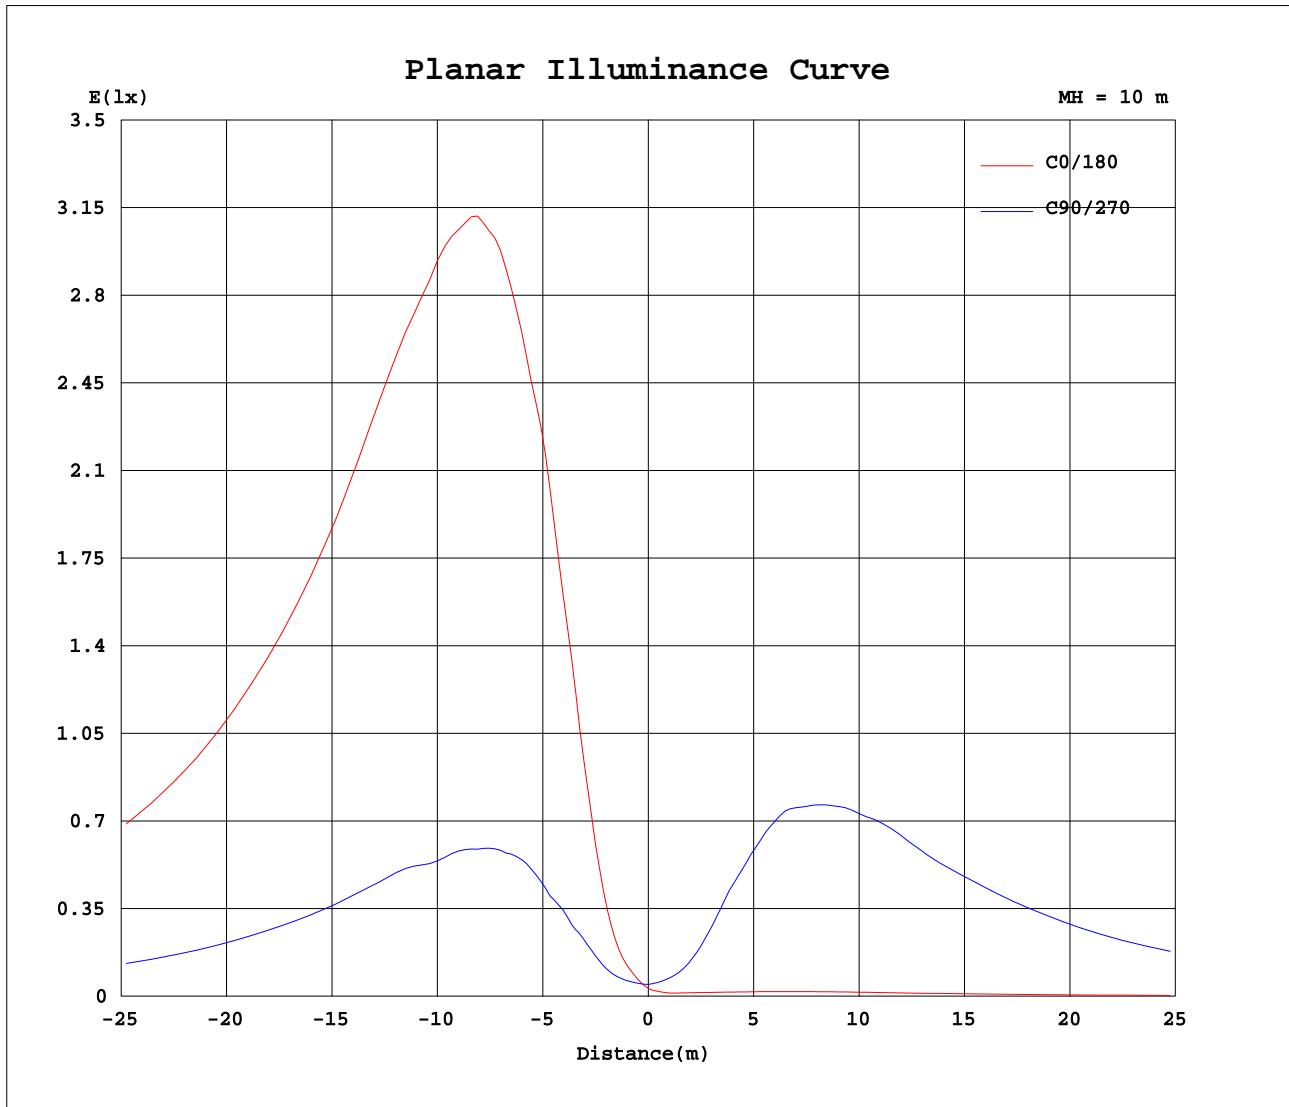

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LH
 Test Date: 2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 9.660m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.4V I:0.2960A P:35.00W PF:0.9900 Lamp Flux:4532.51x1 lm		
NAME: 36W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.08*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04	4.04			
5	13.9	11.6	9.12	6.76	5.10	4.10	3.05	2.24	1.82	2.51	3.54	4.54	5.86	7.82	10.3	12.8			
10	37.9	30.4	21.3	13.3	8.39	5.59	3.46	2.26	1.84	2.64	4.35	6.96	10.5	16.7	25.2	34.0			
15	100	77.7	52.8	30.3	17.1	10.2	5.20	2.74	2.13	3.31	7.03	12.9	21.4	39.0	63.2	88.9			
20	206	162	104	58.0	29.3	17.8	8.14	3.50	2.54	4.48	11.6	22.5	39.4	77.1	128	185			
25	345	273	175	93.5	45.6	27.2	12.5	4.55	3.04	6.28	17.8	34.7	60.8	125	215	302			
30	498	405	258	137	69.0	38.7	18.9	5.82	3.69	8.82	26.3	49.2	88.1	183	307	453			
35	685	539	347	182	89.7	52.0	25.2	7.57	4.38	12.7	35.6	65.8	116	239	406	609			
40	876	677	419	221	111	66.5	31.1	9.63	5.15	14.9	47.8	81.5	144	297	522	770			
45	1051	828	508	267	129	74.8	35.9	10.99	5.92	18.1	52.6	99.1	174	352	624	926			
50	1223	944	574	305	158	87.1	37.5	12.5	6.63	20.8	58.5	111	206	400	708	1063			
55	1356	1026	622	346	175	88.3	38.4	13.2	7.32	21.0	57.9	123	229	450	788	1182			
60	1477	1099	678	385	192	95.7	39.9	13.7	7.97	21.2	63.9	137	256	494	873	1277			
65	1592	1185	732	416	206	101	41.9	14.2	8.57	20.9	67.5	142	278	531	947	1394			
70	1694	1268	780	444	214	106	43.9	15.1	9.07	20.3	71.2	147	296	567	1000	1506			
75	1749	1323	815	461	221	106	42.9	15.6	9.47	20.5	72.6	153	310	590	1030	1573			
80	1785	1348	833	475	227	107	42.9	16.0	9.80	20.9	73.0	158	320	600	1049	1605			
85	1807	1362	838	481	232	110	43.6	16.4	9.97	21.7	74.1	162	324	602	1060	1625			
90	1811	1364	839	481	232	110	43.3	16.5	10.04	21.8	73.9	163	325	601	1061	1626			
95	1799	1354	834	478	231	109	43.6	16.5	9.95	21.8	73.8	162	323	599	1054	1616			
100	1772	1333	816	468	226	107	42.8	16.1	9.78	21.3	72.7	158	316	590	1034	1589			
105	1696	1271	781	450	219	105	43.0	15.7	9.51	20.7	72.3	151	305	571	987	1514			
110	1577	1199	743	433	212	104	43.6	15.2	9.12	20.7	70.6	145	289	546	944	1404			
115	1504	1131	701	402	202	101	42.7	14.4	8.64	20.9	68.9	139	269	508	895	1313			
120	1420	1054	642	369	188	97.3	40.8	13.9	8.12	21.8	64.7	135	250	468	830	1226			
125	1279	967	584	329	173	88.7	40.1	13.1	7.47	21.2	59.4	125	225	428	748	1112			
130	1121	888	535	288	158	89.8	38.9	12.5	6.78	21.6	60.7	112	201	380	666	988			
135	966	757	464	254	133	78.4	38.3	10.88	6.14	19.6	55.6	102	174	330	576	854			
140	787	615	383	213	114	71.0	32.7	9.64	5.41	15.8	50.9	88.0	146	280	485	697			
145	604	489	310	173	92.8	57.7	27.1	7.40	4.67	13.9	40.3	71.8	118	222	371	543			
150	437	352	227	130	71.8	43.3	20.4	5.57	4.01	9.63	29.5	54.5	91.2	169	275	396			
155	283	223	148	87.8	51.3	29.9	13.3	4.10	3.36	6.80	19.6	38.6	64.2	112	181	252			
160	148	118	79.6	50.3	30.9	18.1	7.91	3.02	2.76	4.74	11.9	23.7	38.6	63.2	96.6	135			
165	55.9	46.1	32.7	23.3	15.7	9.25	4.54	2.17	1.80	3.15	6.40	12.2	19.3	27.7	39.2	51.3			
170	12.52	10.14	9.70	8.10	6.01	3.86	2.03	1.05	1.25	1.44	2.91	5.03	7.44	9.15	10.03	11.04			
175	0.58	0.57	0.64	0.80	0.92	0.63	0.70	0.66	0.82	0.84	0.68	0.68	0.60	0.62	0.55	0.55			
180	0.60	0.57	0.58	0.56	0.55	0.55	0.55	0.55	0.57	0.63	0.60	0.55	0.58	0.55	0.53	0.57			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LH
 Test Date:2018-04-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity:65.0%
 Test Distance:9.660m [K=1.0000]
 Remarks: